


大小头同 径三通
异径三通 异径管帽

Reducer Same diameter tee
Reducing tee Reducer cap




英制大小头 ASTM A269.A632

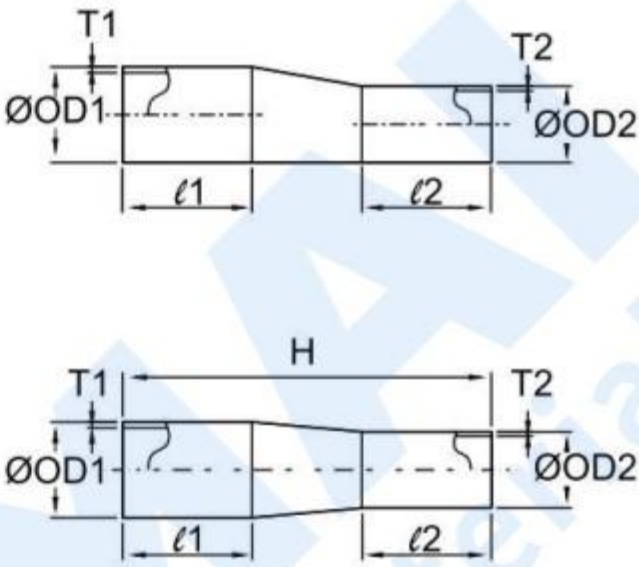


外观尺寸	同径大小头	偏心大小头		
		壁厚	直端长度	H
OD(OD1)	Nominal pipe size at samll end	T(T1, T2)	e(e1, e2)	
1/4"	[1/8"]	1.0(0.89)	29	70
3/8"	[1/4"]	1.0(0.89)	29	RC 70 RE 80
1/2"	3/8", [1/4"]	1.0, 1.24(1.65)	29	RC 75 RE 85
5/8"	[1/2", 3/8", 1/4", 8A]	1.0(1.24)	36	90
3/4"	[5/8", 1/ 2", [3/8" 1/4", 10A](8A)	1.24, 1.65	36	100
1"	3/4", [5/8", 1/ 2"[3/8", 1/4", 15A](10A~8A)	1.65, 1.24	36	105
1-1/4"	1", [3/4", 20A](5/8"~1/4", 15A~8A)	1.65	36	120
1-1/2"	1 1/4", 1", [3/4", 25A](5/8"~1/4", 20A~8A)	1.65	46	125
2"	1 1/2", [1 1/4", 1", [40A](3/4"~1/4", 32A~8A)	1.65	46	130
2-1/2"	2", 1 1/2", [1 1/4", 50A](1"~1/4", 40A~8A)	1.65	51	140
3"	2 1/2", 2", [1 1/2", 50A](1 1/4"~1/4", 40A~8A)	1.65	51	165
4"	3", 2 1/2", 2", [80A](1 1/2"~1/4", 65A~8A)	2.11	51	175
5"	[100A](4"~1/4", 80A~8A)	2.77, 3.05	56	230
6"	[125A](5"~1/4", 100A~8A)	2.77, 3.05	56	250

英制同径三通 ASTM A269.A632

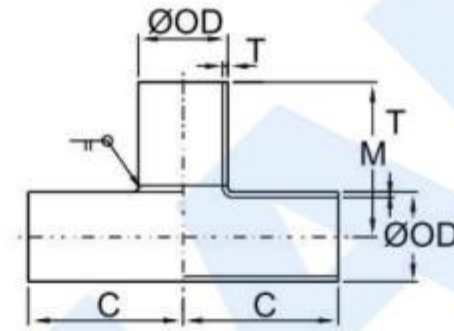

外观和尾部尺寸	同径三通	厚度	
OD(OD1)	C=M	T(in.)	T(mm)
1/4"	35	0.035	0.89
3/8"	37		
1/2"	39	0.049	1.24
5/8"	49	0.058	1.47
3/4"	52	0.065	1.65
1"	55	0.065	1.65
1-1/4"	59	0.065	1.65
1-1/2"	74	0.065	1.65
2"	77	0.065	1.65
2-1/2"	90	0.065	1.65
3"	97	0.065	1.65
4"	110	0.083	2.11
6"	160	0.109	2.77

英制异径三通 ASTM A269.A632

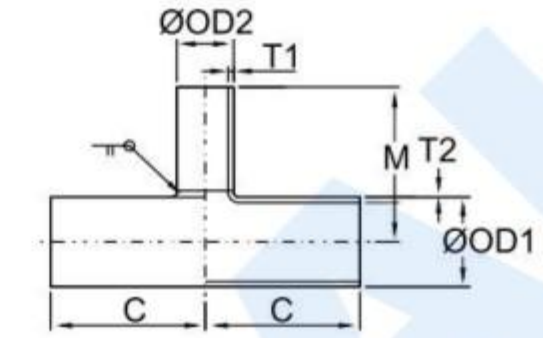

两边尺寸和端部尺寸			
OD(OD1)	C	M	OD2
1/4"	-	-	-
3/8"	37	37	1/4"
1/2"	39	39	3/8", 1/4"
5/8"	47	44	1/2", 3/8", 1/4", 8A
3/4"	47	44	1/2", 3/8", 1/4", 8A
	52	52	5/8", 10A
1"	47	47	1/2", 3/8", 1/4", 8A
	55	55	3/4", 5/8", 15A, 10A
1 1/4"	47	50	1/2", 3/8", 1/4", 8A
	59	59	1", 3/4", 5/8", 20A, 15A, 10A
1 1/2"	57	54	1/2", 3/8", 1/4", 8A
	68	62	1 1/4", 1", 3/4", 5/8", 25A, 20A, 15A, 10A
2"	57	57	1/2", 3/8", 1/4", 8A
	68	65	1 1/4", 1", 3/4", 5/8", 25A, 20A, 15A, 10A
	77	77	1 1/2", 40A, 32A
2 1/2"	61	63	1/2", 3/8", 1/4", 8A
	72	71	1 1/4", 1", 3/4", 5/8", 25A, 20A, 15A, 10A
	90	83	2", 1 1/2", 50A, 40A, 32A
3"	61	71	1/2", 3/8", 1/4", 8A
	72	79	1 1/4", 1", 3/4", 5/8", 25A, 20A, 15A, 10A
	90	90	2", 1 1/2", 50A, 40A, 32A
	97	97	2 1/2", 65A
4"	61	87	1/2", 3/8", 1/4", 8A
	72	95	1 1/4", 1", 3/4", 5/8", 25A, 20A, 15A, 10A
	90	105	2", 1 1/2", 50A, 40A, 32A
	110	110	3", 2 1/2", 80A, 65A
6"	80	115	4", 3", 2 1/2", 100A, 80A, 65A
	100	125	1 1/4", 1", 3/4", 5/8", 25A, 20A, 15A, 10A
	120	135	2", 1 1/2", 50A, 40A, 32A
	140	145	4", 3", 2 1/2", 100A, 80A, 65A
	160	160	5", 125A